

DOCKING PENS

Cl/SfB		
26		Jh

docking pens are light and strong and are easily assembled within minutes. The pens can be readily dismantled and are easily transportable.

A complete pen is formed with interlocking panels of galvanised pipe construction which are covered with galvanised Chain Link Netting. Each unit is complete with a race shut-off gate and a drafting gate which is built into one of the panels. A single or double sided race is optional. Alternative uses for this versatile pen are portable sheep yards, truck or trailer stock pen sides, hurdles and temporary gates.



DOCKING PENS




DIMENSIONS

Length of panels: 2.4 metres
Height of panels: 900mm
Dimensions of pen: 2.4 metres x 2.4 metres.

MATERIAL SPECIFICATIONS

Panel frame: 20 mm inside diameter galvanised pipe.
Panel centre stay: 15mm inside diameter galvanised pipe.
Race gate and Drafting gate frames: 15mm inside diameter galvanised pipe.
Covering: 62.5mm x 3.15mm galvanised Chain Link Netting.

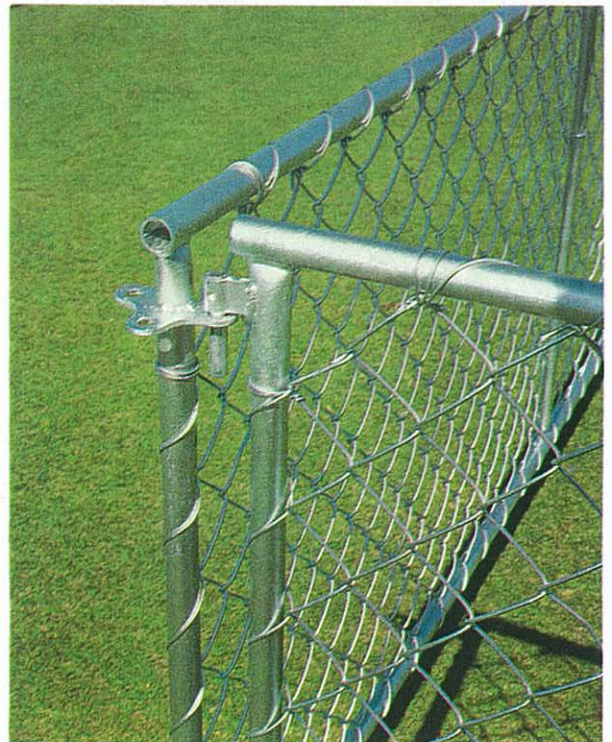

This illustration shows the simple efficient pin and lug connecting system by which the pen size can be increased or additional pens added.